

2 Function with IP Transmitter

92 Series - FET System

SYSTEM PART NUMBER

92202 2 Function Receiver + Keypad with Master + 2 Function IP Transmitter

SPECIAL ORDER

92203 3 Function Receiver + Keypad no Master + 4 Function IP Transmitter

REPLACEMENT TRANSMITTERS

92202TX 2 Function IP Transmitter

92204TX 4 Function IP Transmitter

CONTENTS

1 x Receiver
1 x IP Transmitter
1 x Lanyard
1 x Instructions



Transmitter model shown - 92204TX

IP TRANSMITTER SPECIFICATION

SWITCH Tactile Dome on PCB Keypad

BATTERY 4 x AAA Alkaline Manganese in holder (6 Volts)

INDICATOR

Type	1 x Red LED
Off	Transmitter OFF (The STOP Button has been pressed and released)
Slow flash	Transmitter ON and ready for use (The SET Button has been pressed and released)
On	Transmitting (A STOP, SET or Function Button is being pressed)
Fast flash	Transmitting – Indication that the battery will need replacing soon

CURRENT DRAW

Quiescent	15 micro amps
Operating	24 milliamps

PROTECTION

Reverse polarity	Protected
IP Rating	67
Registration codes	Over 16 million

PERFORMANCE

Temp Range	-10° C to + 40° C (13° F to + 104° F)
Range Nominal as supplied	60 metres (200 ft) from the Receiver, when driving a momentary output without signal drop out
Transmitted power	1 mW Typical

COMPLIANCE

EMC	2004/104/EEC	Exceeds ETSI 300 220	Compliant E11 10R-037601
Modulation	FM		
Frequencies	418.00 MHz F1D	USA (optional UK)	
	433.92 MHz F1D	World wide (optional USA)	

RECEIVER SPECIFICATION

SWITCH TYPE

Output Switching MOS Field Effect Transistor (P Channel Power MOSFET)

SUPPLY VOLTS

Nominal 12/24 Volts DC
 Absolute Maximum 40 Volts DC
 Minimum 8 Volts DC
 Output Switch Supply Internal 12/24 Volts

AMPS

FET Rating 15 Amps
 System Rating 15 Amps
 Quiescent Current 25 mA on Standby (Not SET)
 Overload Protection 15 Amps (Auto Shutdown)

AERIAL

Internal Antenna Yes Supplied and fitted
 External Antenna Optional See Accessories.

OUTPUTS

Master 1 Can be Parallel or Continuous. Not all models – see Build Specification Table.
 Function 2 / 3
 Master (Secondary) 1 Continuous. Not all models, see Build Specification Table.

CONFIGURATION

RS232 Programming to users' requirements Yes Not all models, see Build Specification Table. For programming interlocks, push/push latch, parallel master inhibit, timeout, channel timeout delay, master on delay, radio button de-latching and output allocation.

PERFORMANCE

Simultaneous Outputs Yes With horizontal interlocks (Interlocks are programmable – see CONFIGURATION above)
 Instant TX response Yes No perceivable delay between TX operation and RX action

DIAGNOSTICS

LED's Yes Confirm 5 Volts, SET, Fault and all Outputs.

PROTECTION


ESR Safety Yes See ESR Safety document.
 Back EMF Yes Diode protected on all outputs
 Registration codes Over 16 million
 STOP Connection Yes Internal Emergency Stop Connection. Not all models, see Build Specification Table.

WIRING

Wiring Loom Yes 3 metres (10ft) supplied and fitted
 Cable Gland Yes Supplied and fitted
 Connections Screw terminal into plug and socket on PCB, for easy "swap out"

ENCLOSURE

Weight 0.3 lbs (335gms)
 Lid Clear PVC - to view LEDs
 Base Black PVC
 Breather Gortex fitted in base
 Mounting 4 external lugs
 Fixings 5mm (3/16") not supplied
 IP Rating Performs to IP67 standard (0.5 metre water for 1 hour)

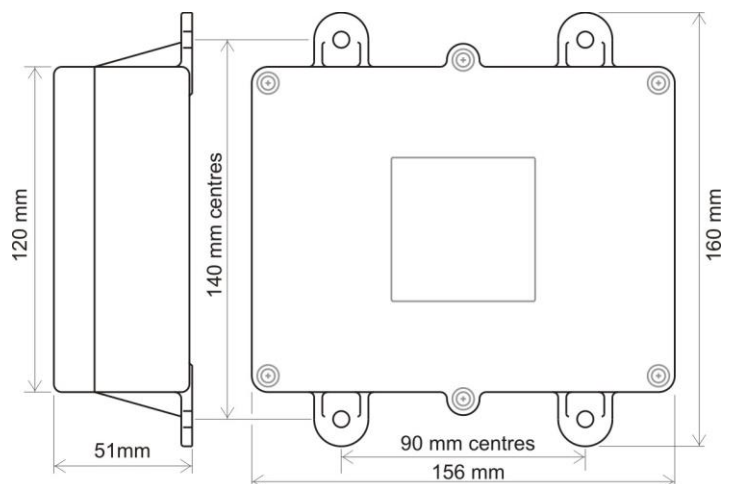

ACCESSORIES

9861, 9862, 9863 and 9869 – External Antenna with cable.

