

# 90000 - 2 Function & Mini Transmitter

## 90 Series - Relay System (No Master)

### SYSTEM PART NUMBER

90000 2 Function Receiver + 2 Function Mini Transmitter

### REPLACEMENT TRANSMITTER

90002TX 2 Function Mini Transmitter

### CONTENTS

1 x Receiver  
1 x Mini Transmitter  
1 x Lanyard  
1 x Instructions



### MINI TRANSMITTER SPECIFICATION

#### SWITCH

Type Rubber membrane with carbon contact

#### BATTERY

Type 3 Volts (2 x AAA)

#### CURRENT DRAW

Quiescent 4 micro amps  
Operating 20 milliamps

#### PROTECTION

Reverse polarity Protected  
IP Rating 65  
Registration codes Over 16 million

#### PERFORMANCE

Temp Range -10° C to + 40° C (13° F to + 104° F)  
Range Nominal as supplied 45 metres (150 ft) from the Receiver, when driving a momentary output without signal drop out  
Transmitted power 1 mW Typical

#### COMPLIANCE

EMC	Exceeds ETSI 300 220.	Compliant E11 10R-037601
Modulation	FM	
Frequencies	418.00 MHz F1D 433.92 MHz F1D	USA (optional UK) World wide (optional USA)

## RECEIVER SPECIFICATION

### SWITCH TYPE

Output Switching Relay

### SUPPLY VOLTS

Nominal 12/24 Volts DC  
 Absolute Maximum 40 Volts DC  
 Minimum 8 Volts DC  
 Output Switch Supply Internal 12/24 Volts or external up to 80 Volts DC max  
 External requires optional connector (see Accessories Part 9011)

### AMPS

Relay Rating 5 Amps  
 System Output Rating 8 Amps  
 Quiescent Current 25 mA on Standby (Not Set)  
 Overload Protection None

### AERIAL

Internal Antenna Yes Supplied and fitted  
 External Antenna Optional Receiver must be ordered with SMA connector (see Accessories Part 9010).

### OUTPUTS

Master None  
 Functions 2

### CONFIGURATION

RS232 programming Optional Receiver must be ordered with RS232 connector (see Accessories Part 9011) for programming to user requirements; interlocks, push/push latch, parallel master inhibit, timeout, channel timeout delay, master output delay etc.

### PERFORMANCE

Simultaneous Outputs Yes With horizontal interlocks (Interlocks are programmable – see CONFIGURATION above)  
 Instant TX Response Yes No perceivable delay between TX operation and RX action

### DIAGNOSTICS

LED's Yes Confirm 5 Volts, SET, Fault and all Outputs.

### PROTECTION


ESR Safety Yes See ESR Safety document.  
 Back EMF Yes Diode protected on all outputs  
 Registration codes Yes Over 16 million  
 STOP Connection Optional External Emergency STOP connector (see Accessories Part 9011).

### WIRING

Wiring Loom Yes 3.00 metres (10ft) supplied and fitted  
 Cable Gland Yes Supplied and fitted  
 Connections Screw terminal into plug and socket on PCB, for easy “swap out”

### ENCLOSURE

Weight 0.3 lbs (335gms)  
 Lid Black PVC  
 Base Black PVC  
 Breather Gortex fitted in base  
 Mounting 4 external lugs  
 Fixings 5mm (3/16”) not supplied  
 IP Rating Performs to IP67 standard  
 (0.5 metre water for 1 hour)

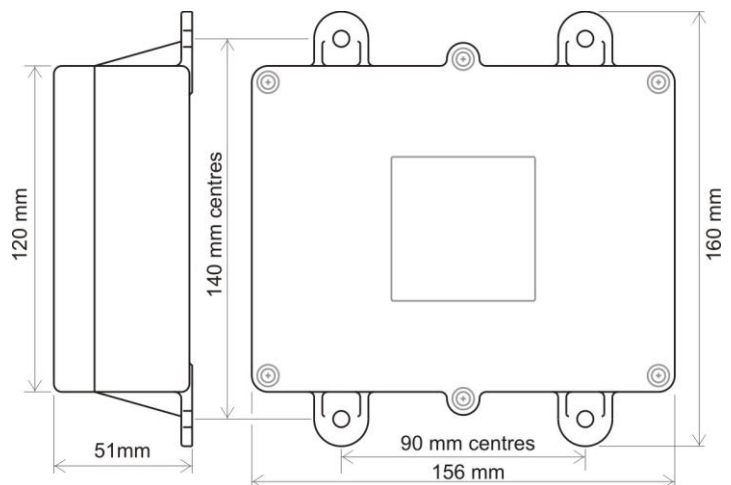

### ACCESSORIES


9861, 9862, 9863 and 9869 – External Antenna with cable.  
 9010 – SMA Connector, for external aerial  
 9011 – ST, S+ & S- connector and RS232 connector

90 Series			90000	90002	90004	90100	90102	90104
BUILD SPECIFICATION TABLE FOR MODELS IN THIS RANGE								
Ident	Legend	Connection						
X1	+ - F1 F2	Positive, Negative, F1 and F2	S	S	S	S	S	S
X2	F3 F4 M	F3, F4, and Master		M	S		M	S
X3	ST Vs- Vs+	STOP and Vs- Vs+	O	O	O	O	O	O
X4	ANT	Internal Antenna	S	S	S	S	S	S
X5		SMA (external antenna)	O	O	O	O	O	O
LK1		Master (configuration)		C	C		C	C
LK2		RS232	O	O	O	O	O	O
LK3		RS232	O	O	O	O	O	O
LK4		Safety (parallel master)		C	C		C	C
		3 metre (10ft) 4 core cable	S			S		
		3 metre (10ft) 7 core cable		S	S		S	S
		9801 Lo-Cover				S	S	S

S = Standard. M = Standard but Master only connected. O = Optional extra. C = Customer configured (see "Factory Settings").

- + Positive 12/24 Volt supply
- Negative 0 Volts
- F1, F2, F3, F4 Outputs F1 to F4
- M Master Output
  
- ST STOP - grounding shuts down the Receiver
- Vs- Vs+ 12/24 Volt supply for control circuits  
(used when link is broken to allow switching of DC Voltages outside normal operating limits)
- ANT Blade Connector for Internal Antenna
- SMA Aerial Connection for External Antenna (Internal Antenna must be removed)
  
- LK1 Master Selection by jumper (AP = Parallel, AM = Continuous)
- Factory Settings 418MHz configured Parallel, 433.92MHz configured Continuous
- LK2 RS232 for programming
- LK3 RS232 for interface with other RS232 modules
- LK4 Connected when using Parallel Master, connects safety circuit

### Photo of 4 Function PCB

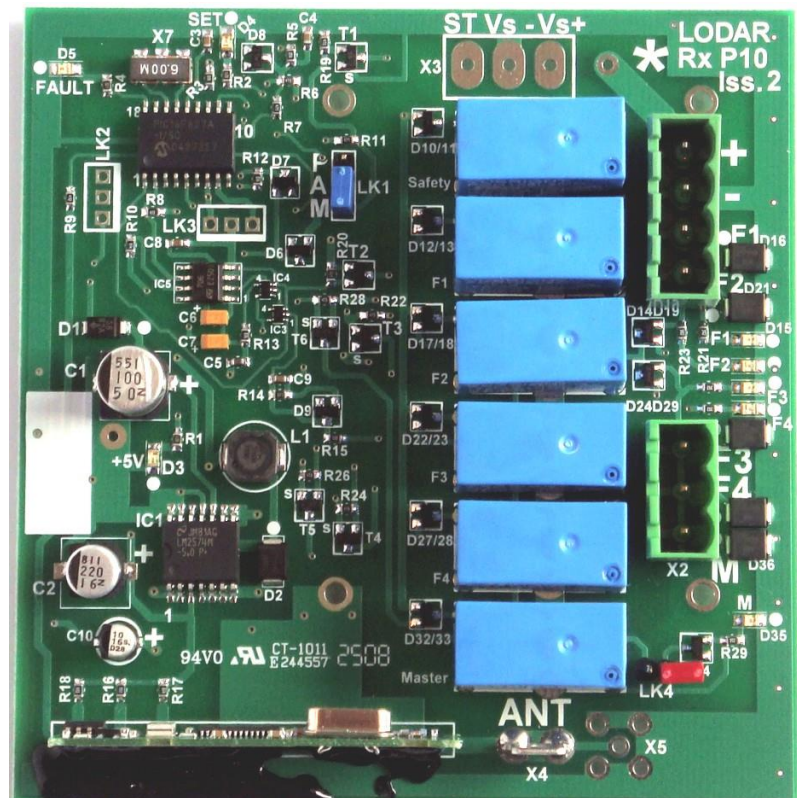

w90000.06