



2 Function with Slim Transmitter

SYSTEM PART NUMBER

113000 2 Function Mini Receiver + 2 Function Slim Transmitter. No Master

REPLACEMENT TRANSMITTER

TX3002 2 Function Slim Transmitter

CONTENTS

- 1 x Mini Receiver
- 1 x Slim Transmitter
- 1 x Lanyard
- 1 x Instructions



SLIM TRANSMITTER SPECIFICATION

ENCLOSURE

Material	ABS	
Switch Type	12mm Dome Switch Functions	2
Identification	Pockets for printed text or image insertion	

RF

Modulation	2-GFSK. Gaussian Frequency Shift Keying	
Frequency	433.050 MHz to 434.790 MHz	
Channels	1	
Channel Selection	Fixed	
Technology	Hand-held Transmitter	
Temperature Range	-30deg.C to 85deg.C (except batteries). Use Lithium for lower temperatures	
Range	60m (300ft)	
Registration Codes	Over 16 million	
Aerial	Internal – printed on PCB	

POWER

Batteries	2 x AA – 3 volts. Temperature Range -40deg.C to 54deg.C	
Quiescent Current	5µA	
Current Standby (SET)	2mA	
Current Transmitting	30mA	
RF Radiated Power	0dBm	

SAFETY & PROTECTION

IP Rating	55
Reverse Polarity Protection	Yes – MOSFET

INFORMATION

Transmit Indication	LED on when TX operated
Fault Codes	LED flashes fault code
Low Battery	LED flashes when TX operated

COMPLIANCE

See compliance documentation

MINI RECEIVER SPECIFICATION

ENCLOSURE

Material Lid	Clear PVC - to view LEDs
Base	Black ABS
Dimensions	120 x 110 x 38mm (4.72 x 4.33 x 1.5ins.)
Weight	230 gms
Breather	Gortex membrane
IP Rating	IP67
Functional Identification	LED though clear lid
Mounting	4 external lugs
Fixings	5mm (3/16") - not supplied

ELECTRICAL

Voltage Nominal	12/24 volts
Voltage Min/Max	9 to 32 volts
Connection	1.5m (5ft) 4 core cable through gland
Switch Type	MOS Field Effect Transistor (MOSFET)
System Current – max.	6 amps.
Functions	2

RF

Modulation	2-GFSK. Gaussian Frequency Shift Keying
Frequency	433.050 MHz to 434.790 MHz
Channels	1
Channel Selection	Fixed
Technology	Fixed Receiver
Temperature Range	-30deg.C to 85deg.C
Range	60m (200ft)
Range max.	300m (1000ft) in open ground
Registration Codes	Over 16 million

AERIAL

Aerial	Internal – ¼ wave wire
Aerial option	SMA Connector optional – order separately
External Antenna	AC9860/1/2/3 & 9 – order separately

POWER

Quiescent Current	65mA
Current Standby (SET)	68mA
RF Radiated Power	0dBm

SAFETY & PROTECTION

Back EMF	Yes – protection diodes
Reverse Polarity	Yes
System Monitoring	Yes – using a secondary processor
Transient Voltage	Yes – TVS Diode 30.8 volts. 10amp fuse recommended
Overload	Yes – by temperature sensor

CONFIGURATION

Operating System	Lodar Script
Functions	Momentary with Horizontal Interlocks
Master Output	No

INFORMATION

Fault code	Yes	LED
Receive Indication	Yes	LED

PACKAGING


Brown Box	with coloured sleeve
-----------	----------------------

COMPLIANCE

See compliance documentation

TRANSMITTER

STX3006 - 6 Function Shown

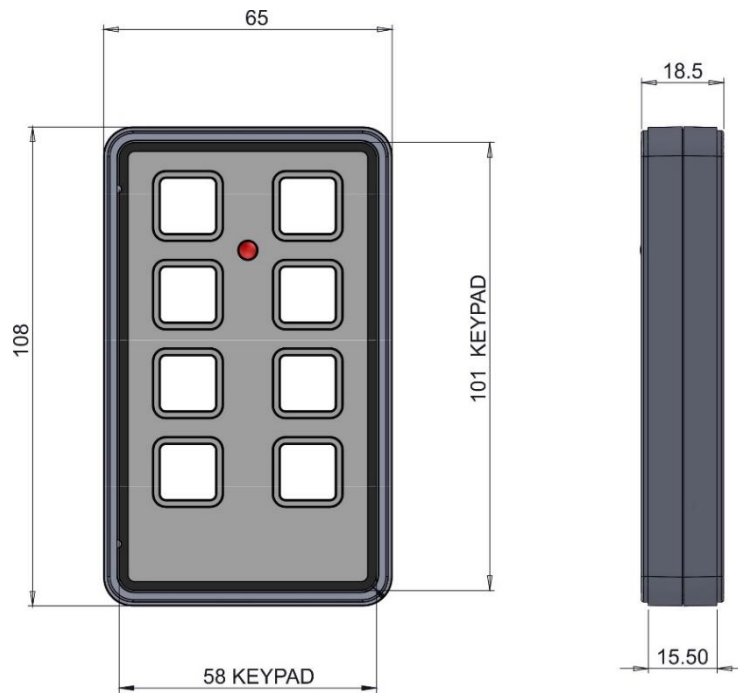

RECEIVER

S11RX02 & S11RX04 - 2/4 Function Shown

