



## RECEIVER SPECIFICATION

### SWITCH TYPE

Output Switching MOS Field Effect Transistor (P Channel Power MOSFET)

### SUPPLY VOLTS

Nominal 12/24 Volts DC  
 Absolute Maximum 40 Volts DC  
 Minimum 8 Volts DC  
 Output Switch Supply Internal 12/24 Volts

### AMPS

FET Rating 15 Amps  
 System Rating 15 Amps  
 Quiescent Current 25 mA on Standby (Not SET)  
 Overload Protection 15 Amps (Auto Shutdown)

### AERIAL

Internal Antenna Yes Supplied and fitted  
 External Antenna Optional See Accessories.

### OUTPUTS

Master 1 Parallel or Continuous. Not all models - see Build Specification Table.  
 Function 2  
 Master (Secondary) 1 Continuous. Not all models - see Build Specification Table.

### CONFIGURATION

RS232 Programming to users requirements Yes Not all models, see Build Specification Table for programming interlocks, push/push latch, parallel master inhibit, timeout, channel timeout delay, master on delay, radio button de-latching and output allocation.

### PERFORMANCE

Simultaneous Outputs Yes With horizontal interlocks (Interlocks are programmable – see CONFIGURATION above)  
 Instant Tx response Yes No perceivable delay between TX operation and RX action

### DIAGNOSTICS

LED's Yes Confirm 5 Volts, SET, Fault and all Outputs.

### PROTECTION


ESR Safety Yes See ESR Safety document.  
 Reverse Polarity Yes Protected (with provisions)  
 Back EMF Yes Diode protected on all outputs  
 Conformal Coating Yes  
 Registration codes Over 16 million  
 STOP Connection Yes Internal Emergency Stop Connection, Not all models, see Build Specification Table.

### WIRING

Wiring Loom Yes 3 metres (10ft) supplied and fitted  
 Cable Gland Yes Supplied and fitted  
 Connections Screw terminal into plug and socket on PCB, for easy "swap out"

### ENCLOSURE

Weight 0.3 lbs (335gms)  
 Lid Smoke PVC - to view LEDs  
 Base Black PVC  
 Breather Gortex fitted in base  
 Mounting 4 external lugs  
 Fixings 5mm (3/16") not supplied  
 IP Rating Performs to IP67 standard (0.5 metre water for 1 hour)

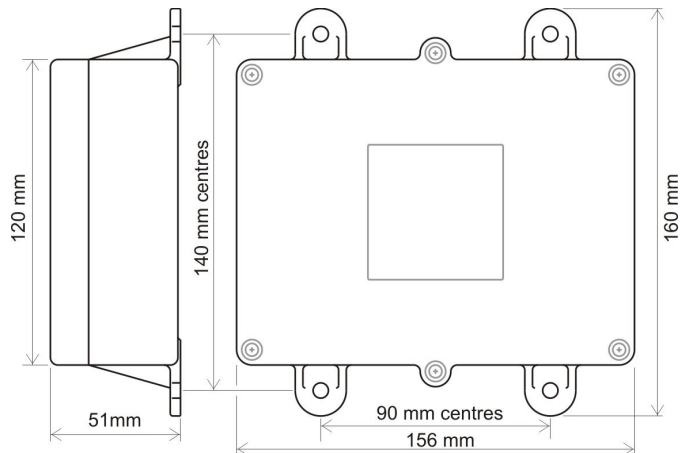

### ACCESSORIES

9861, 9862, 9863 and 9869 – External Antenna with cable.

92 Series			92 2 00	92 2 02	92 2 03	92 2 04	92 5 05
BUILD SPECIFICATION TABLE FOR MODELS IN THIS RANGE							
Ident	Legend	Connection					
	+ - F1 F2	Positive, Negative, F1 and F2	S	S	S	S	S
	F3 F4 M	F3, F4, and Master		M	F3	S	S
	ST -	STOP and -		S	S	S	S
	S+ S-	S+ S-		S	S	S	S
	ANT	Internal Antenna	S	S	S	S	S
	SMA	Connector (external antenna)		S	S	S	S
LK1	P	Master - Parallel		C		C	
LK2	C	Master – Continuous		C		C	
LK3	RS232	RS232		S	S	S	S
		3 metres 4 core	S				
		3 metres 7 core		S	S	S	S

S = Standard. M = Standard but Master only connected. C = Customer configured (see "Factory Settings").

+ Positive 12/24 Volt supply  
 - Negative 0 Volts  
 F1, F2, F3 & F4 Outputs to F1 through F4  
 M Master Output

STOP - STOP, when grounded shuts down the Receiver  
 S+ S- Master Secondary for Safety solenoid connections etc.  
 ANT Blade connector for internal antenna  
 SMA Aerial connection for optional external antenna (internal antenna must be removed)

LK1 Jumper fitted to this link for continuous Master  
 LK2 Jumper fitted to this link for parallel Master  
 Factory Settings 418MHz configured Parallel, 433.92MHz configured Continuous  
 LK3 RS232 for interface to access special programmes  
 Also for connection to RS232 modules

Photo of PCB

